




1300 Data Sheet



SERIES: 1000 WOOD GRILLES

STYLE: 1300 LAY-IN GRILLE

Overview

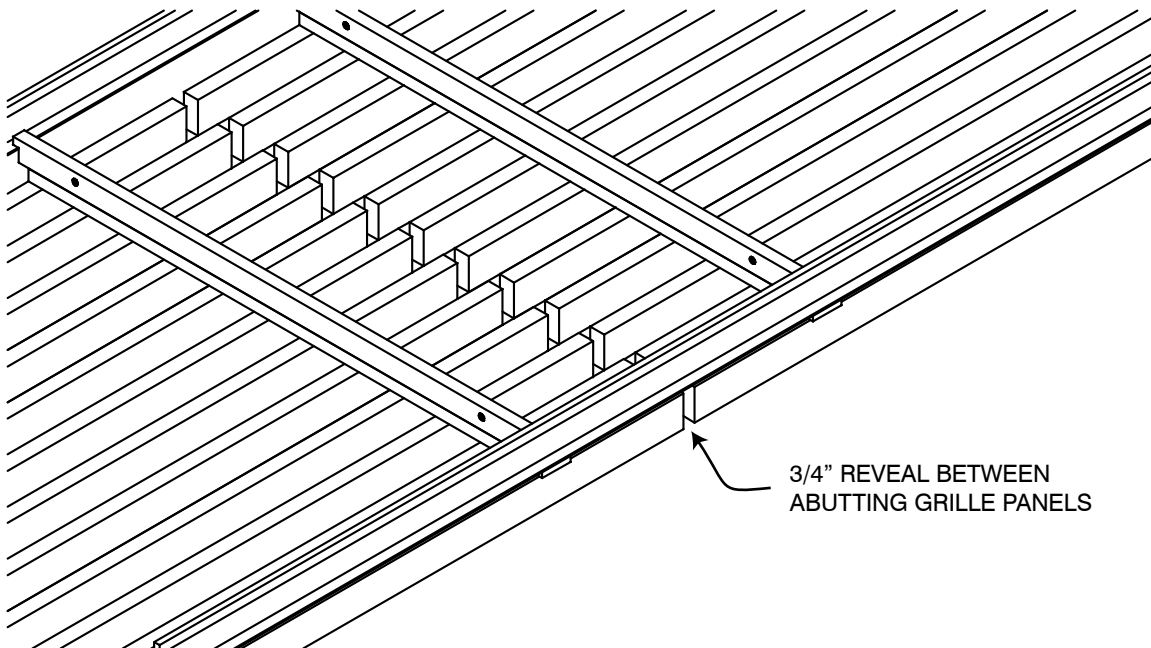

The **9Wood Lay-In Grille** wood ceiling offers a design where the individual wood member is deeper than it is wide. The standard panel width is 12". Standard panel lengths are 4', 6', 8', or 10' (nominal).

Attachment for the Lay-In Grille is via lay-in backers resting on 15/16" heavy-duty T-Bar grid.



1300 Data Sheet



SERIES: 1000 WOOD GRILLES

STYLE: 1300 LAY-IN GRILLE

Product Data

Application

The Lay-in Grille uses a pre-assembled panel fabrication process. This product typically installs in non-seismic areas. In seismic zones it requires a safety-wire tie-off or lock-down screws. Panel access is by means of lift, shift, and remove.

Performance

Acclimatization

Lay-In Grilles must be cared for in a controlled interior environment (RH 25%-55% max; temp. 60°-80°) and installed only after reaching equilibrium moisture content. Should the building fall outside these limits consult 9Wood, Inc. for our 3 Tests/3 Tracks Acclimatization Advisory.

Acoustics

The Lay-In Grille can enhance acoustics via sound-absorbing material placed over open reveals within the T-Bar grid. Insulation is typically provided locally.

Fire Rating

Individual members and components can be treated with Class I (A) Fire Retardant chemicals (solid wood use FR coatings, veneered particleboard use FR formulas). Particular species or styles have not been tested.

LEED

Lay-In Grilles may qualify toward MR-3, MR-4.1/4.2, MR-5.1/5.2, MR-6, MR-7, IEQ-4.2 or IEQ-4.4. As all products are custom-fabricated, LEED credit opportunities are project by project. Please contact 9Wood, Inc. for specifics.

MEP

The Lay-In Grille permits MEP penetrations in the ceiling's surface. Cut panels may require supplemental reinforcement. Fixtures and diff users must be independently supported.

Seismic

Lay-In Style Wood Grille panels lay into standard T-Grid. They may require safety wire tie-off or screw lock to T-Bar. Please consult local code or a licensed engineer for any additional requirements.

Species & Finishes

9Wood can offer both domestic and imported species for the Lay-In Grille. Clear, satin sheen finish is standard; custom stain matches are available.

Suspension

Lay-In Grilles lift and shift into 15/16" heavy duty T-Bar main runners. Main runners are typically 2' on center.

System Weight

Lay-In Grilles typically weigh 2-4 pounds per square foot, depending on members per linear foot and species.




1300 Data Sheet



SERIES: 1000 WOOD GRILLES

STYLE: 1300 LAY-IN GRILLE

Typical Specifications

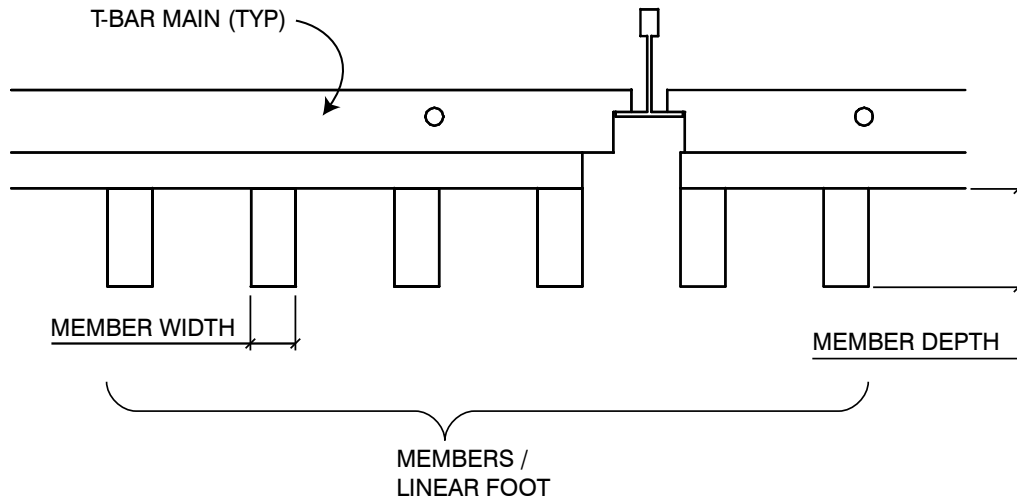

SKU Table

Width (Softwood)	Width (Hardwood or Veneer)	Depth	Grille Members per Linear Foot								
			2	3	4	5	6	7	8	9	10
5/8"	3/4"	1 3/8"	1312-2	1312-3	1312-4	1312-5	1312-6	1312-7	1312-8	1312-9	1312-10
5/8"	3/4"	2 1/4"	1313-2	1313-3	1313-4	1313-5	1313-6	1313-7	1313-8	1313-9	1313-10
5/8"	3/4"	3 1/4"	1314-2	1314-3	1314-4	1314-5	1314-6	1314-7	1314-8	1314-9	1314-10
1 3/8"	1"	1 3/8"	1322-2	1322-3	1322-4	1322-5	1322-6				
1 3/8"	1"	2 1/4"	1323-2	1323-3	1323-4	1323-5	1323-6				
1 3/8"	1"	3 1/4"	1324-2	1324-3	1324-4	1324-5	1324-6				
1 3/8"	1"	5 1/4"	1326-2	1326-3	1326-4	1326-5	1326-6				

* Other width, depth and M/LF combinations available. Please inquire.
 ** Please see 9wood.com for information on appropriate species selections.